

SLI021030NW

SLI021030NW

FIALE II 6W COB 38DEG 230V NW LED SPOT BRUSHED ALUMINIUM RING




Power **6 W**
Colour temperature **4000 K**
Beam angle **38 °**

Voltage **230 V**
Colour of light **Neutral white**
Degree of protection (IP) **IP20**

Technical data

Code	SLI021030NW
Power	6 W
Nominal current	50 mA
Voltage	230 V
Energy consumption	6 kWh/1000h
Frequency	50HZ Hz
Protection class	II
Power supply included	+
Power factor	0.5
Luminous flux**	420 lm (360°)
Lamp efficacy	70 lm/W
Colour temperature	4000 K
Colour of light	Neutral white
Beam angle	38 °
RA	80
Uniformity of color SDCM max	5
Dimmable	No
Working temperature range	-20/+40 °
Lifespan	17000 h
Housing material	Aluminum
Degree of protection (IP)	IP20
Colour	SREBRNY
Dimension (AxBxC)	86xH65 mm
Mounting hole	fi 75 mm
For use	Inside
Assembly method	Recessed
Application	INT
Made in	PRC

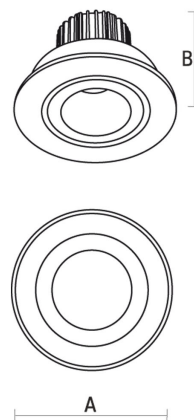

Related documents



 Declaration of Conformity