




Power **15 W**
Luminous flux* **1200 lm (90°)**
Light colour **WW**
Protection class **IP44/IP20*****

Voltage **230 V**
Colour temperature **3000 K**
Beam angle **90 °**

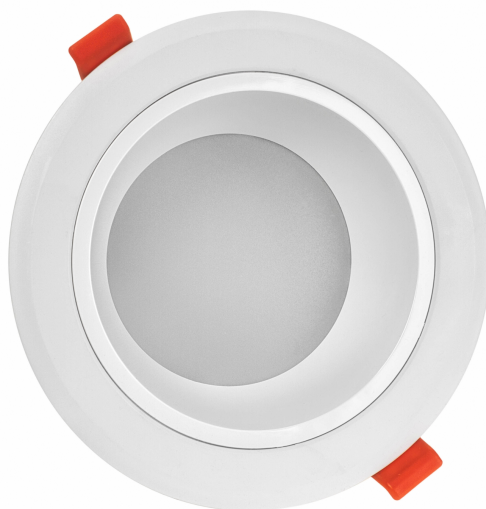

 Declaration of Conformity



 Photometric file



 3D model

Technical data:

Product code	SLI022007WW_IP44
Power	15 W
Nominal current	70 mA
Voltage	230 V
Energy efficiency classe	F
Energy consumption	15 kWh/1000h
Frequency	50HZ Hz
Protection class	II
Power supply included	+
Useful luminous flux*	1200 lm (90°)
Luminous flux**	1200 lm (360°)
Light efficiency	80 lm/W
Colour temperature	3000 K
Light colour	WW
Beam angle	90 °
RA	80
Uniformity of color SDCM max	5
Dimmable	-
Working temperature range	-20/+40 °
Lifespan	17000 h
Housing material	PLASTIC
Protection class	IP44/IP20***
Colour	White
Dimension (axbxc)	150x80 mm
Mounting hole	130 mm
For use	Inside/Outside
Assembly method	Recessed
Made in	PRC



*Applies to the LED source used. **Luminaire luminous flux

A version with CNBOP-PIB* certificate is also available (valid only in Poland).***Degree of protection [IP] (from the bottom/ from the top)