

# LIMEA GO

SLI028034NW\_PW

Hermetic luminaire LIMEA GO, with a power of 25 W, high light efficacy 130 lm/W. It has a very high degree of protection IP65, providing protection against the ingress of dust and water jets. IK07 class provides impact resistance. It shines with light of neutral - the most universal colour (4000K). Suitable for both surface and suspended mounting. The product is certified by the National Institute of Hygiene, so it can be used in rooms with high hygienic requirements.

IP65


IK07



Power	<b>25 W</b>	Voltage	<b>230 V</b>
Luminous flux*	<b>3250 lm (360°)</b>	Colour temperature	<b>4000 K</b>
Colour of light	<b>Neutral white</b>	Beam angle	<b>120 °</b>
IK	<b>07</b>	Degree of protection (IP)	<b>IP65</b>

## Technical data

Code	SLI028034NW_PW
Power	25 W
Nominal current	120 mA
Voltage	230 V
Energy consumption	25 kWh/1000h
Frequency	50HZ Hz
Protection class	II
Power factor	0.9
Useful luminous flux*	3250 lm (360°)
Luminous flux**	3000 lm (360°)
Lamp efficacy	130 lm/W
Colour temperature	4000 K
Colour of light	Neutral white
Beam angle	120 °
RA	80
Light source included	+
Uniformity of color SDCM max	5
Dimmable	No
Working temperature range	-20/+40 °
Lifespan	17000 h
Housing material	plastic
IK	07
Degree of protection (IP)	IP65
Dimension (AxBxC)	600x60x52 mm
For use	Outside
Assembly method	On the ceiling, Suspended
Made in	PRC

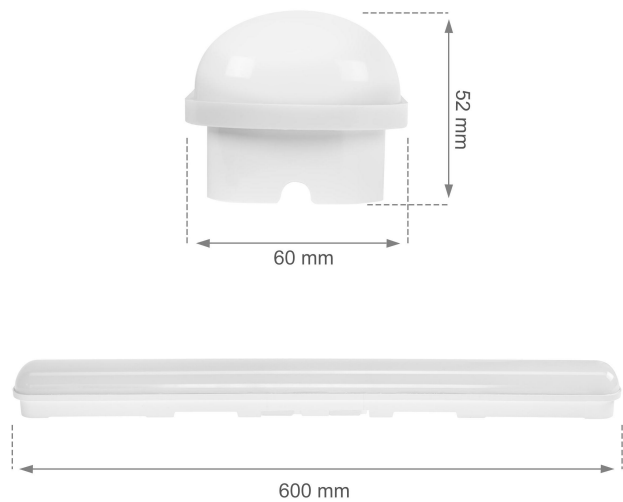

## Related documents

[User manual](#)[Declaration of Conformity](#)

