

NOCTIS LUX 2

SLI029042NW_CZUJNIK

Floodlight NOCTIS LUX 2, with a power of 20 W. It has a high IP44 rating, making it ideal for use in areas of high humidity. It shines with light of neutral - the most universal colour (4000K). Designed for surface mounting.


IP44



Power	20 W	Voltage	230 V
Luminous flux*	1820 lm (120°)	Colour temperature	4000 K
Colour of light	Neutral white	Beam angle	100 °
Degree of protection (IP)	IP44		


Technical data

Code	SLI029042NW_CZUJNIK
Power	20 W
Nominal current	100 mA
Voltage	230 V
Energy consumption	20 kWh/1000h
Frequency	50HZ Hz
Protection class	I
Power supply included	+
Power factor	0,5
Useful luminous flux*	1820 lm (120°)
Luminous flux**	1750/1820 lm (360°)
Lamp efficacy	88 lm/W
Colour temperature	4000 K
Colour of light	Neutral white
Beam angle	100 °
RA	80
Uniformity of color SDCM max	5
Dimmable	No
Working temperature range	-20/+40 °
Lifespan	17000 h
Housing material	Aluminum, PLASTIC, GLASS
Degree of protection (IP)	IP44
Colour	White
Dimension (AxBxC)	158x121x25 mm
For use	Inside/Outside
Assembly method	On the ceiling
Application	INT/EXT
Made in	PRC

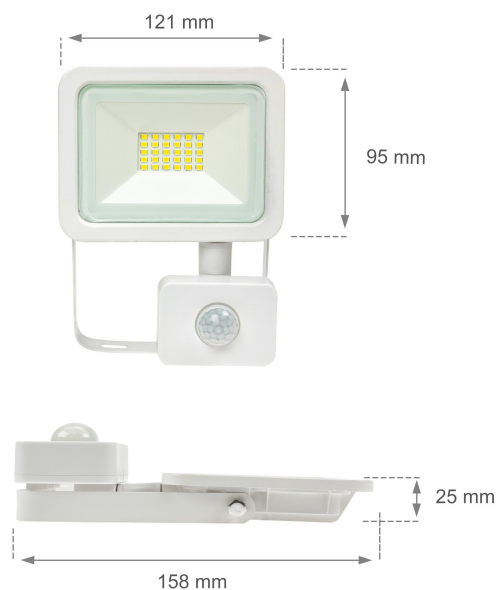

Related documents



 Declaration of Conformity



 Photometric file

	<p>Kühlkörper für effektive Wärmeableitung</p> <p>Langlebige LEDs</p> <p>Gehärtetes Glas</p> <p>IP65 Schutzklasse</p> <p>Verstellbarer Griff</p> <p>Gummikabel 30cm</p> <p>Einstellbarer PIR-Bewegungsmelder</p> <p>Langer Griff</p>	
<p>Beleuchtungszeitsteuerung min: 10 sec ± 3 sec max: 7 min ±12min</p> <p>Erkennungsabstand 2-10m (< 24°C)</p> <p>Umgebungslicht 3-2000 LUX</p>	<p>121 mm</p> <p>95 mm</p> <p>158 mm</p> <p>25 mm</p>	<p>121 mm</p> <p>95 mm</p> <p>158 mm</p> <p>25 mm</p>