

# NOCTIS LUX 2

SLI029042WW\_CZUJNIK

Floodlight NOCTIS LUX 2, with a power of 20 W. It has a high IP44 rating, making it ideal for use in areas of high humidity. It shines with a warm light (3000K). Designed for surface mounting.


IP44



Power	<b>20 W</b>	Voltage	<b>230 V</b>
Luminous flux*	<b>1790 lm (120°)</b>	Colour temperature	<b>3000 K</b>
Colour of light	<b>WW</b>	Beam angle	<b>100 °</b>
Degree of protection (IP)	<b>IP44</b>		


## Technical data

Code	SLI029042WW_CZUJNIK
Power	20 W
Nominal current	100 mA
Voltage	230 V
Energy consumption	20 kWh/1000h
Frequency	50HZ Hz
Protection class	I
Power supply included	+
Power factor	0,5
Useful luminous flux*	1790 lm (120°)
Luminous flux**	1700/1790 lm (360°)
Lamp efficacy	85 lm/W
Colour temperature	3000 K
Colour of light	WW
Beam angle	100 °
RA	80
Uniformity of color SDCM max	5
Dimmable	No
Working temperature range	-20/+40 °
Lifespan	17000 h
Housing material	Aluminum, PLASTIC, GLASS
Degree of protection (IP)	IP44
Colour	White
Dimension (AxBxC)	158x121x25 mm
For use	Inside/Outside
Assembly method	On the ceiling
Application	INT/EXT
Made in	PRC

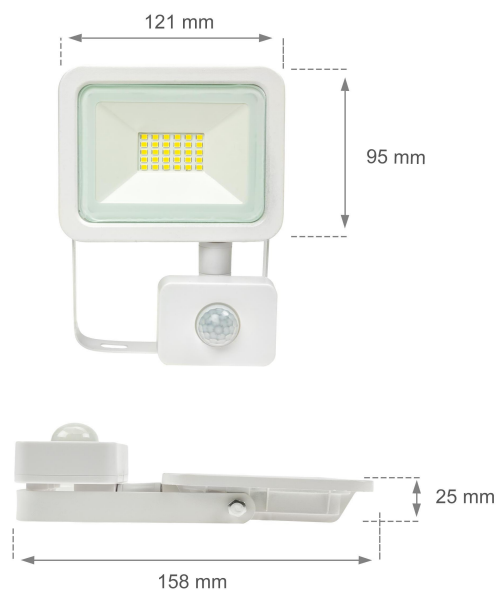

## Related documents



 Declaration of Conformity



 Photometric file

	<p>Kühlkörper für effektive Wärmeableitung</p> <p>Langlebige LEDs</p> <p>Gehärtetes Glas</p> <p>IP65 Schutzklasse</p> <p>Verstellbarer Griff</p> <p>Gummikabel 30cm</p> <p>Einstellbarer PIR-Bewegungsmelder</p> <p>Langer Griff</p>	
<p>Beleuchtungszeitsteuerung min. 10 sec. ± 3 sec max. 7 min ±12min</p> <p>Erkennungsabstand 2-10m (&lt; 24°C)</p> <p>Umgebungslicht 3-2000 LUX</p>	<p>121 mm</p> <p>95 mm</p> <p>158 mm</p> <p>25 mm</p>	<p>121 mm</p> <p>95 mm</p> <p>158 mm</p> <p>25 mm</p>