

NOCTIS LUX 3

SLI029053NW_PW

Floodlight NOCTIS LUX 3, with a power of 20 W, high light efficacy 100 lm/W. It has a very high degree of protection IP65, providing protection against the ingress of dust and water jets. IK07 class provides impact resistance. It shines with light of neutral - the most universal colour (4000K). Designed for surface mounting.

IP65


IK07



Power	20 W	Voltage	230 V
Luminous flux*	2000 lm (120°)	Colour temperature	4000 K
Colour of light	Neutral white	Beam angle	100 °
IK	07	Degree of protection (IP)	IP65


Technical data

Code	SLI029053NW_PW
Power	20 W
Nominal current	90 mA
Voltage	230 V
Energy consumption	20 kWh/1000h
Frequency	50HZ Hz
Protection class	I
Power supply included	+
Power factor	0.9
Useful luminous flux*	2000 lm (120°)
Luminous flux**	2000 lm (360°)
Lamp efficacy	100 lm/W
Colour temperature	4000 K
Colour of light	Neutral white
Beam angle	100 °
RA	>70
Uniformity of color SDCM max	5
Dimmable	No
Working temperature range	-20/+40 °
Lifespan	17000 h
Housing material	Aluminum, GLASS
IK	07
Degree of protection (IP)	IP65
Colour	White
Dimension (AxBxC)	120x90x27 mm
For use	Outside
Assembly method	On the ceiling
Application	EXT
Made in	PRC

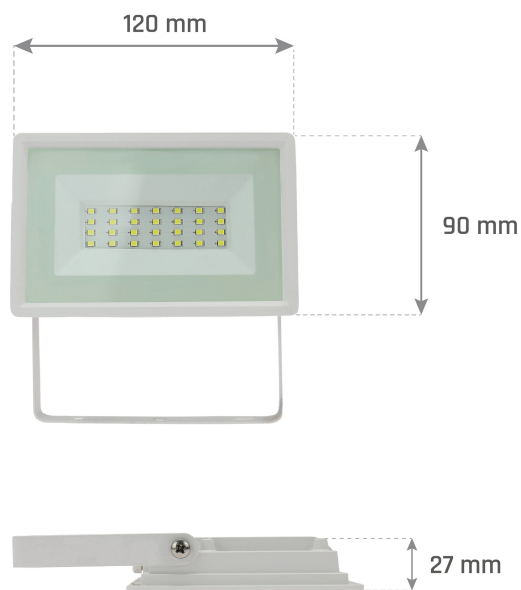

Related documents



 Declaration of Conformity



 Photometric file

