

NYMPHEA BLACK & WHITE

SLI031034WW_PW


Plafond NYMPHEA BLACK & WHITE, with a power of 18 W, high light efficacy 108 lm/W. It has a high IP54 rating, making it ideal for use in rooms with high humidity. It shines with a warm light (3000K), which promotes relaxation and rest, making the illuminated room cosier. Designed for surface mounting. The product is certified by the National Institute of Hygiene, so it can be used in rooms with high hygienic requirements.

IP54

| | | | |
|---------------------------|-----------------------|--------------------|---------------|
| Power | 18 W | Voltage | 230 V |
| Luminous flux* | 1950 lm (360°) | Colour temperature | 3000 K |
| Colour of light | WW | Beam angle | 115 ° |
| Degree of protection (IP) | IP54 | | |


Technical data

| | |
|------------------------------|----------------|
| Code | SLI031034WW_PW |
| Power | 18 W |
| Nominal current | 125 mA |
| Voltage | 230 V |
| Energy consumption | 18 kWh/1000h |
| Frequency | 50HZ Hz |
| Protection class | II |
| Power supply included | + |
| Power factor | 0.6 |
| Useful luminous flux* | 1950 lm (360°) |
| Luminous flux** | 1150 lm (360°) |
| Lamp efficacy | 108 lm/W |
| Luminous intensity | 760 cd |
| Colour temperature | 3000 K |
| Colour of light | WW |
| Beam angle | 115 ° |
| RA | >80 |
| Light source included | + |
| Uniformity of color SDCM max | 5 |
| Dimmable | No |
| Working temperature range | -20 +40 ° |
| Lifespan | 17000 h |
| Housing material | Plastic |
| Degree of protection (IP) | IP54 |
| Colour | White |
| Dimension (AxBxC) | 250x52 mm |
| For use | Inside |
| Assembly method | On the ceiling |
| Application | Inside |
| Made in | PRC |

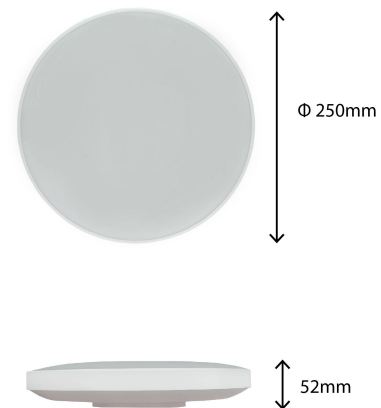

Related documents



 Declaration of Conformity



 Photometric file

