

ALGINE

SLI035012NW

ALGINE LED 230V 32W 100LM/W IP20 600X600MM NW CEILING PANEL


IK06



Power	32 W	Voltage	230 V
Luminous flux*	3240 lm (120°)	Colour temperature	4000 K
Colour of light	Neutral white	Beam angle	120 °
UGR	<22	IK	06

Technical data

Code	SLI035012NW
Power	32 W
Nominal current	154 mA
Voltage	230 V
Energy efficiency class	E
Energy consumption	32 kWh/1000h
Frequency	50HZ Hz
Protection class	II
Power supply included	+
Power factor	0.9
Useful luminous flux*	3240 lm (120°)
Luminous flux**	3240 lm (360°)
Lamp efficacy	101 lm/W
Colour temperature	4000 K
Colour of light	Neutral white
Beam angle	120 °
UGR	<22
RA	80
Uniformity of color SDCM max	5
Dimmable	OPC
Working temperature range	-20/+40 °
Lifespan	17000 h
Housing material	Aluminum, PLASTIC
IK	06
Degree of protection (IP)	IP20
Colour	White
Dimension (AxBxC)	595x595x10 mm
Mounting hole	575x575 mm
For use	Inside
Assembly method	Recessed, On the ceiling, Suspended
Application	INT
Made in	PRC

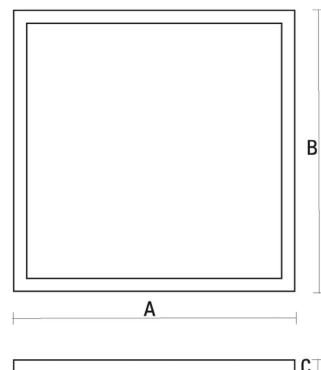

Related documents

 Declaration of Conformity Photometric file 3D model

