

# ALGINE

SLI035038NW


LED panel ALGINE, with a power of 45 W, high light efficacy 100 lm/W. It is made of high-quality components, supported by a 5-year warranty. Lights up with neutral light - the most universal colour (4000K), which is suitable for the rooms we use on a daily basis, ensuring comfort during everyday activities. Suitable for surface, recessed and suspended mounting.



Power	<b>45 W</b>	Voltage	<b>230 V</b>
Luminous flux*	<b>4850 lm (360°)</b>	Colour temperature	<b>4000 K</b>
Colour of light	<b>Neutral white</b>	Beam angle	<b>120 °</b>
UGR	<b>&lt;19</b>	IK	<b>06</b>


## Technical data

Code	SLI035038NW
Power	45 W
Nominal current	200 mA
Voltage	230 V
Energy efficiency class	E
Energy consumption	45 kWh/1000h
Frequency	50HZ Hz
Protection class	II
Power supply included	+
Power factor	0.95
Useful luminous flux*	4850 lm (360°)
Luminous flux**	4500 lm (360°)
Lamp efficacy	100 lm/W
Colour temperature	4000 K
Colour of light	Neutral white
Beam angle	120 °
UGR	<19
RA	80
Uniformity of color SDCM max	5
Dimmable	No
Working temperature range	-20/+40 °
Lifespan	50000 h
Housing material	Aluminum, PLASTIC
IK	06
Degree of protection (IP)	IP20
Colour	White
Dimension (AxBxC)	595x595x10 mm
Mounting hole	575x575 mm
For use	Inside
Assembly method	Recessed, On the ceiling, Suspended
Application	INT
Made in	PRC
Other	L80B50 50000h MTBF 80000h ,

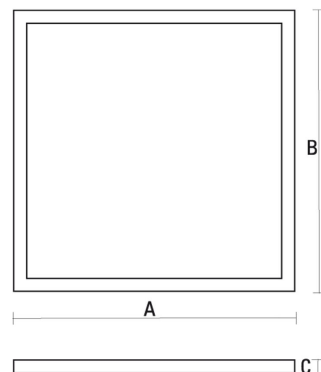

## Related documents



 Declaration of Conformity



 Photometric file



 3D model

