

SLI037027NW_PW

SLI037027NW_PW


IK06



Power	6 W	Voltage	230 V
Luminous flux*	750 lm (360°)	Colour temperature	4000 K
Colour of light	Neutral white	Beam angle	110 °
IK	06	Degree of protection (IP)	IP20


Technical data

Code	SLI037027NW_PW
Power	6 W
Nominal current	48 mA
Voltage	230 V
Energy consumption	6 kWh/1000h
Frequency	50HZ Hz
Protection class	II
Power supply included	Yes
Power factor	0,5
Useful luminous flux*	750 lm (360°)
Luminous flux**	550 lm (360°)
Lamp efficacy	122 lm/W
Luminous intensity	220 cd
Colour temperature	4000 K
Colour of light	Neutral white
Beam angle	110 °
RA	>80
Light source included	Yes
Uniformity of color SDCM max	5
Dimmable	No
Working temperature range	-20 to +40 °
Lifespan	17000 h
Housing material	PLASTIC
IK	06
Degree of protection (IP)	IP20
Colour	White
Dimension (AxBxC)	115x35 mm
Mounting hole	95 mm
For use	Inside
Assembly method	On the ceiling, Recessed
Application	Inside
Made in	PRC

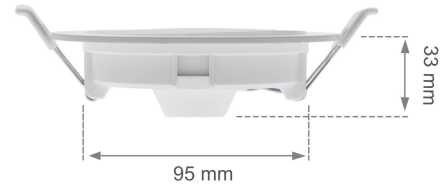

Related documents

[!\[\]\(3211b5d1d968fc1665909b34f9f16010_img.jpg\) User manual](#)[!\[\]\(c50c8b7b2cc2cf9ff925edec0ee94c0d_img.jpg\) Declaration of Conformity](#)[!\[\]\(9c2e8d1b5bd77cb5c9f83b7a9cff79fd_img.jpg\) 3D model](#)

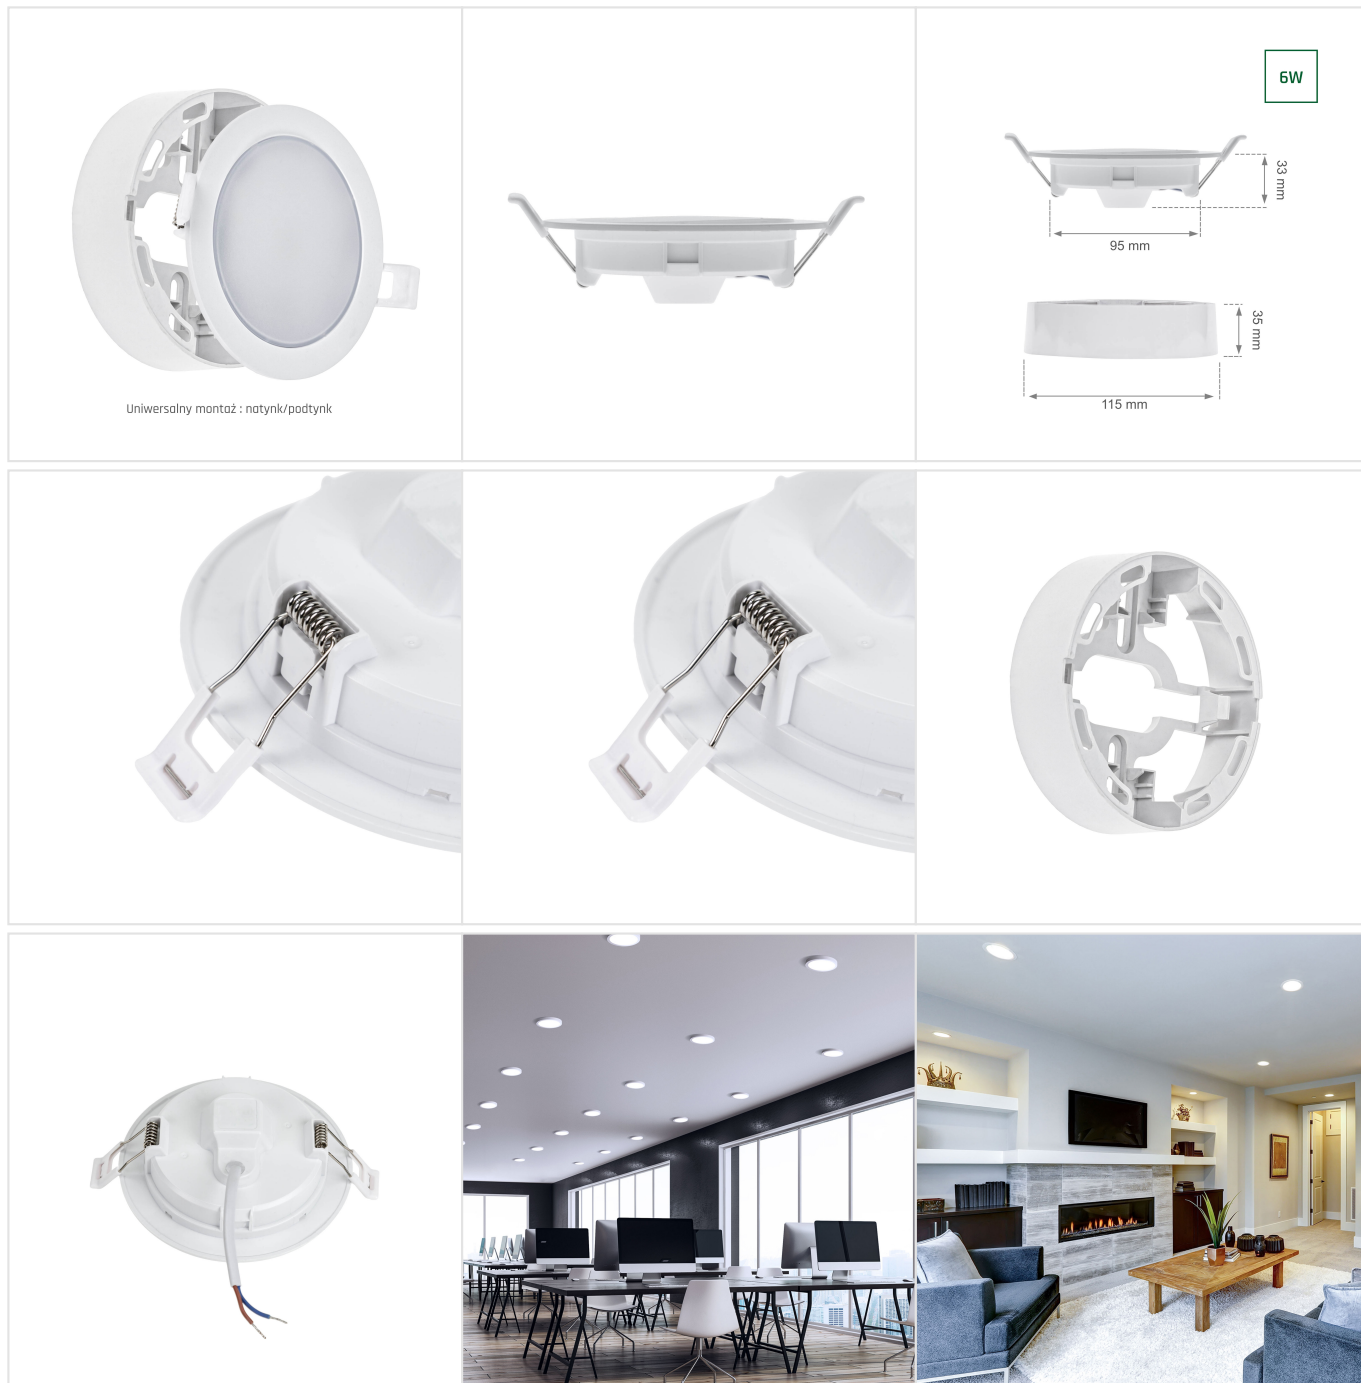

Uniwersalny montaż : natynk/podtynk

6W

33 mm
95 mm
36 mm
115 mm