

# CABINET

SLI040021NW

LED luminaire CABINET, with a power of 18 W, high light efficacy 100 lm/W. Lights up with neutral light - the most universal colour (4000K), which is suitable for the rooms we use on a daily basis, ensuring comfort during everyday activities. Designed for surface mounting.




---

|                           |                       |                    |               |
|---------------------------|-----------------------|--------------------|---------------|
| Power                     | <b>18 W</b>           | Voltage            | <b>230 V</b>  |
| Luminous flux*            | <b>1800 lm (360°)</b> | Colour temperature | <b>4000 K</b> |
| Colour of light           | <b>Neutral white</b>  | Beam angle         | <b>120 °</b>  |
| Degree of protection (IP) | <b>IP20</b>           |                    |               |

---


## Technical data

|                              |                |
|------------------------------|----------------|
| Code                         | SLI040021NW    |
| Power                        | 18 W           |
| Nominal current              | 140 mA         |
| Voltage                      | 230 V          |
| Energy efficiency class      | F              |
| Energy consumption           | 18 kWh/1000h   |
| Frequency                    | 50HZ Hz        |
| Protection class             | II             |
| Power supply included        | +              |
| Power factor                 | 0.5            |
| Useful luminous flux*        | 1800 lm (360°) |
| Luminous flux**              | 1800 lm (360°) |
| Lamp efficacy                | 100 lm/W       |
| Colour temperature           | 4000 K         |
| Colour of light              | Neutral white  |
| Beam angle                   | 120 °          |
| RA                           | 80             |
| Uniformity of color SDCM max | 5              |
| Dimmable                     | No             |
| Working temperature range    | -20/+40 °      |
| Lifespan                     | 17000 h        |
| Housing material             | PC             |
| Degree of protection (IP)    | IP20           |
| Colour                       | SREBRNY        |
| Dimension (AxBxC)            | 1183x21x32 mm  |
| For use                      | Inside         |
| Assembly method              | On the ceiling |
| Application                  | INT            |
| Made in                      | PRC            |

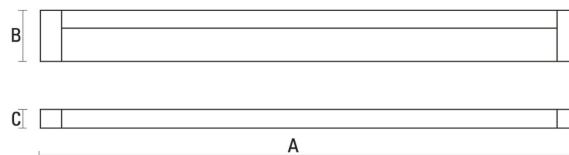

## Related documents



 Declaration of Conformity



 Photometric file