

SLI040030NW

SLI040030NW

CABINET LINEAR LED SMD 3,3W 12V 300MM NW POINT TOUCH



Power **3,3 W**

Colour temperature **4000 K**

Beam angle **120 °**


Voltage **12 V**

Colour of light **Neutral white**

Degree of protection (IP) **IP20**

Technical data

Code	SLI040030NW
Power	3,3 W
Nominal current	275 mA
Voltage	12 V
Energy consumption	4 kWh/1000h
Frequency	DC Hz
Protection class	III
Power factor	1
Luminous flux**	250 lm (360°)
Lamp efficacy	75 lm/W
Colour temperature	4000 K
Colour of light	Neutral white
Beam angle	120 °
RA	80
Uniformity of color SDCM max	5
Dimmable	Yes
Working temperature range	-20/+40 °
Lifespan	17000 h
Housing material	Aluminum, PLASTIC
Degree of protection (IP)	IP20
Colour	SREBRNY
Dimension (AxBxC)	300x29x10 mm
For use	Inside
Assembly method	On the ceiling
Application	INT
Made in	PRC

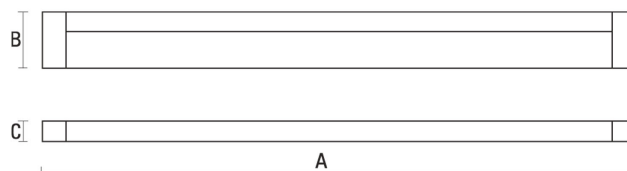

Related documents



 Declaration of Conformity