

TECHNIC LAMP

SLI041045NW_PW

See
more

Technic luminaire TECHNIC LAMP, with a power of 8 W, high light efficacy 118 lm/W. It has a high IP54 rating, making it ideal for use in rooms with high humidity. IK10 class provides impact resistance. It shines with light of neutral - the most universal colour (4000K). Designed for surface mounting.

IP54


IK10



| | | | |
|-----------------|----------------------|---------------------------|---------------|
| Power | 8 W | Voltage | 230 V |
| Luminous flux* | 940 lm (360°) | Colour temperature | 4000 K |
| Colour of light | Neutral white | Beam angle | 120 ° |
| IK | 10 | Degree of protection (IP) | IP54 |

Technical data

| | |
|---------------------------|----------------|
| Code | SLI041045NW_PW |
| Power | 8 W |
| Nominal current | 65 mA |
| Voltage | 230 V |
| Energy consumption | 8 kWh/1000h |
| Frequency | 50HZ Hz |
| Protection class | II |
| Useful luminous flux* | 940 lm (360°) |
| Luminous flux** | 850 lm (360°) |
| Lamp efficacy | 118 lm/W |
| Colour temperature | 4000 K |
| Colour of light | Neutral white |
| Beam angle | 120 ° |
| RA | >80 |
| Light source included | Yes |
| Dimmable | No |
| Working temperature range | -20/+40 ° |
| Lifespan | 17000 h |
| Housing material | PC |
| IK | 10 |
| Degree of protection (IP) | IP54 |
| Colour | White |
| Dimension (AxBxC) | 140x48 mm |
| For use | Inside/Outside |
| Assembly method | On the ceiling |
| Made in | PRC |
| Other | IP54 , |

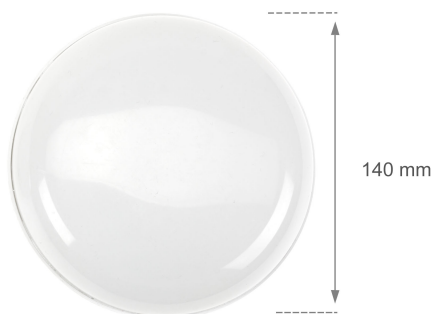

Related documents

[!\[\]\(3211b5d1d968fc1665909b34f9f16010_img.jpg\) User manual](#)[!\[\]\(c50c8b7b2cc2cf9ff925edec0ee94c0d_img.jpg\) Declaration of Conformity](#)[!\[\]\(9c2e8d1b5bd77cb5c9f83b7a9cff79fd_img.jpg\) Photometric file](#)

