

AQUATICA

SLI043017WW_PW

LED luminaire AQUATICA, with a power of 15 W, high light efficacy 120 lm/W. It has a high IP44 rating, making it ideal for use in rooms with high humidity. It shines with a warm light (3000K), which promotes relaxation and rest, making the illuminated room cosier. Designed for surface mounting.

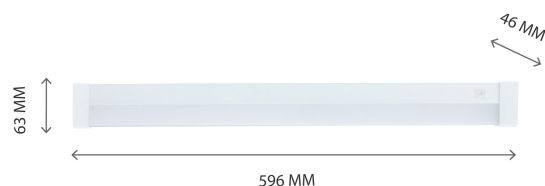
IP44

| | | | |
|---------------------------|-----------------------|--------------------|---------------|
| Power | 15 W | Voltage | 230 V |
| Luminous flux* | 1800 lm (360°) | Colour temperature | 3000 K |
| Colour of light | WW | Beam angle | 150 ° |
| Degree of protection (IP) | IP44 | | |


Technical data

| | |
|------------------------------|----------------|
| Code | SLI043017WW_PW |
| Power | 15 W |
| Nominal current | 115 mA |
| Voltage | 230 V |
| Energy consumption | 15 kWh/1000h |
| Frequency | 50HZ Hz |
| Protection class | II |
| Power supply included | + |
| Power factor | 0.6 |
| Useful luminous flux* | 1800 lm (360°) |
| Luminous flux** | 1600 lm (360°) |
| Lamp efficacy | 120 lm/W |
| Colour temperature | 3000 K |
| Colour of light | WW |
| Beam angle | 150 ° |
| RA | >80 |
| Light source included | + |
| Uniformity of color SDCM max | 5 |
| Dimmable | No |
| Working temperature range | -20 +40 ° |
| Lifespan | 17000 h |
| Housing material | Plastic |
| Degree of protection (IP) | IP44 |
| Colour | White |
| Dimension (AxBxC) | 596x46x63 mm |
| For use | Inside |
| Assembly method | On the ceiling |
| Application | Inside |
| Made in | PRC |

IP44

120
lm/W

Related documents

 Declaration of Conformity Photometric file

