


# DURE 3

SLI043021NW\_PW

Downlight luminaire DURE 3, with a power of 5 W, high light efficacy 130 lm/W. It has a high IP54 rating, making it ideal for use in rooms with high humidity. Lights up with neutral light - the most universal colour (4000K), which is suitable for the rooms we use on a daily basis, ensuring comfort during everyday activities. Designed for recessed mounting.

IP54

IK06

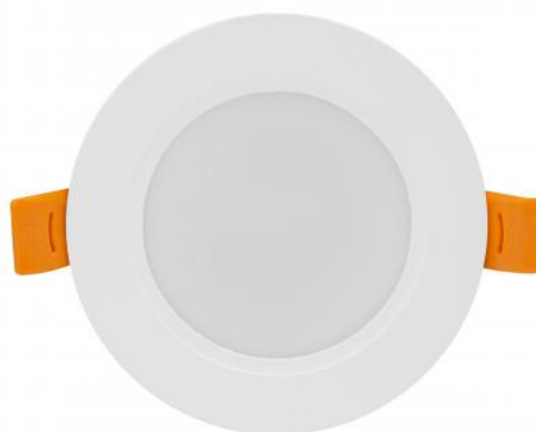

Power	<b>5 W</b>	Voltage	<b>230 V</b>
Luminous flux*	<b>650 lm (360°)</b>	Colour temperature	<b>4000 K</b>
Colour of light	<b>Neutral white</b>	Beam angle	<b>110 °</b>
IK	<b>6</b>	Degree of protection (IP)	<b>IP54</b>


## Technical data

Code	SLI043021NW_PW
Power	5 W
Nominal current	36 mA
Voltage	230 V
Energy consumption	5 kWh/1000h
Frequency	50HZ Hz
Protection class	II
Power factor	0.6
Useful luminous flux*	650 lm (360°)
Luminous flux**	500 lm (360°)
Lamp efficacy	130 lm/W
Colour temperature	4000 K
Colour of light	Neutral white
Beam angle	110 °
RA	80
Uniformity of color SDCM max	5
Dimmable	No
Working temperature range	-20/+40 °
Lifespan	17000 h
Housing material	PC+PS
IK	6
Degree of protection (IP)	IP54
Colour	White
Dimension (AxBxC)	95x31 mm
Mounting hole	72 mm
For use	Inside
Assembly method	Recessed
Application	INT
Made in	PRC



## Related documents



 User manual




 Declaration of Conformity



 Photometric file



 3D model

