

MOBILO LED CCT

SLI043023CCT_PW

LED luminaire MOBILO LED CCT with the possibility of changing the light color (CCT), with a power of 6,5 W, high light efficacy 130 lm/W. Thanks to the ability to change the color temperature (CCT) in the range 2700/4000/6000K, we can adjust the light color depending on our needs and preferences. Narrow beam angle 36° gives directional light so that selected objects or surfaces can be better exposed. Designed for recessed mounting.

CCT




Power	6,5 W	Voltage	230 V
Luminous flux*	850 lm (360°)	Colour temperature	2700/4000/6000 K
Colour of light	CCT	Beam angle	36 °
Degree of protection (IP)	IP20		

Technical data

Code	SLI043023CCT_PW
Power	6,5 W
Nominal current	52 mA
Voltage	230 V
Energy consumption	7 kWh/1000h
Frequency	50HZ Hz
Protection class	II
Power factor	0,5
Useful luminous flux*	850 lm (360°)
Luminous flux**	800 lm (360°)
Lamp efficacy	130 lm/W
Luminous intensity	1300 cd
Colour temperature	2700/4000/6000 K
Colour of light	CCT
Beam angle	36 °
RA	80
Light source included	Yes
Uniformity of color SDCM max	5
Dimmable	No
Working temperature range	-20/+40 °
Lifespan	17000 h
Housing material	PC+PS
Degree of protection (IP)	IP20
Colour	White
Dimension (AxBxC)	105x35 mm
Mounting hole	90 mm
For use	Inside
Assembly method	Recessed
Application	INT
Made in	PRC
Other	Light color change function 2700K/4000K/6000K ,

Logistics data

Bulk packaging	20 pcs.
Gross weight (1 pcs.)	0.29 kg

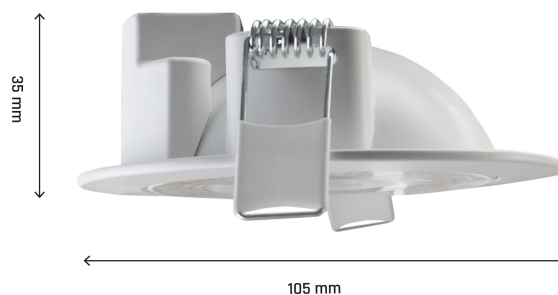

Related documents

 User manual Declaration of Conformity

