

PLATEO 3 DALI

SLI044017NW_PW_DALI

High bay luminaire PLATEO 3 DALI, with a power of 100 W, high light efficacy 180 lm/W. It is made of high-quality components, supported by a 5-year warranty. It has a very high degree of protection IP65, providing protection against the ingress of dust and water jets. IK08 class provides impact resistance. It shines with light of neutral - the most universal colour (4000K). Narrow beam angle 90° gives directional light so that selected surfaces can be better exposed. Designed for suspended mounting.



IP65


IK08



Power	100 W	Voltage	230 V
Luminous flux*	18000 lm (360°)	Colour temperature	4000 K
Colour of light	Neutral white	Beam angle	90 °
IK	08	Degree of protection (IP)	IP65

Technical data

Code	SLI044017NW_PW_DALI
Power	100 W
Nominal current	460 mA
Voltage	230 V
Energy consumption	100 kWh/1000h
Frequency	50HZ Hz
Protection class	I
Power supply included	Yes
Power factor	0.9
Useful luminous flux*	18000 lm (360°)
Luminous flux**	17000 lm (360°)
Lamp efficacy	180 lm/W
Luminous intensity	8300 cd
Colour temperature	4000 K
Colour of light	Neutral white
Beam angle	90 °
RA	>80
Light source included	Yes
Uniformity of color SDCM max	5
Dimmable	DALI
Working temperature range	-20 +40 °
Lifespan	50000 h
Housing material	Aluminum
IK	08
Degree of protection (IP)	IP65
Colour	Black
Dimension (AxBxC)	270x160 mm
For use	Inside/Outside
Assembly method	Suspended
Made in	PRC

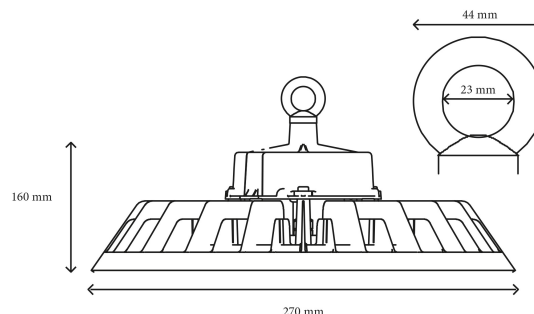

Related documents



 User manual



 Declaration of Conformity



 Photometric file

