

MADARA MINI RING II GU10

SLIP003028

On track luminaire MADARA MINI RING II GU10 for replaceable light source. Designed to be mounted on a track.



Voltage **250 V**

Socket **GU10**


Degree of protection (IP) **IP20**

Technical data

Code	SLIP003028
Voltage	250 V
Protection class	I
Light source included	No
Working temperature range	-20 to +40 °
Lifespan	17000 h
Housing material	Aluminum/AKRYL
Socket	GU10
Degree of protection (IP)	IP20
Colour	White
Dimension (AxBxC)	55x110x185 (210mm Adapter) mm
For use	Inside
Assembly method	NA SZYNOPROOutsideÓD 3-FAZOWY
Application	Inside
Made in	PRC
Other	MAX 10W LED; NO INTENDED FOR HALOGEN ,

Logistics data

Bulk packaging	40 pcs.
Quantity per pallet	800 pcs.
Gross weight (1 pcs.)	0.263 kg

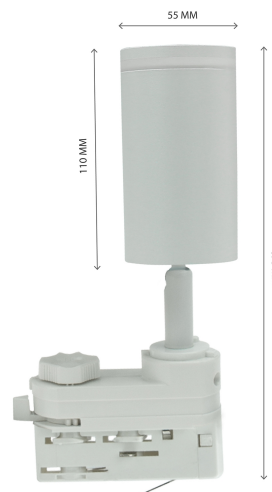

GU10. Oprawa sprzedawana bez źródła światła. MAX 10W LED; MAX 35W Halogen.

Related documents

 Declaration of Conformity Photometric file

