

WLD+40003_SMART

WLD+40003_SMART

SYSTEM SHIFT SMART- SPOT M TRACK LIGHT FI44X161X106MM 10W 24DEG WHITE CCT/DIM 5 Y WARRANTY




Power	10 W	Voltage	48 V
Colour temperature	3000/4000/6000 K	Colour of light	CCT
Beam angle	24 °	Degree of protection (IP)	IP20

Technical data

Code	WLD+40003_SMART
Power	10 W
Nominal current	200 mA
Voltage	48 V
Energy consumption	10 kWh/1000h
Frequency	DC Hz
Protection class	III
Power factor	1
Useful luminous flux*	950 lm (360°)
Luminous flux**	650 lm (360°)
Lamp efficacy	95 lm/W
Luminous intensity	2100 cd
Colour temperature	3000/4000/6000 K
Colour of light	CCT
Beam angle	24 °
RA	>90
Light source included	Yes
Uniformity of color SDCM max	5
Working temperature range	-20 to +40 °
Lifespan	50000 h
Housing material	AL+PC
Degree of protection (IP)	IP20
Colour	White
Dimension (AxBxC)	44x157x178 mm
For use	Inside
Assembly method	NA SZYNOPROOutsideÓD 48V
Application	Inside
Made in	PRC
Other	CCT/DIM ,

Logistics data

Bulk packaging	50 pcs.
Gross weight (1 pcs.)	0.26 kg

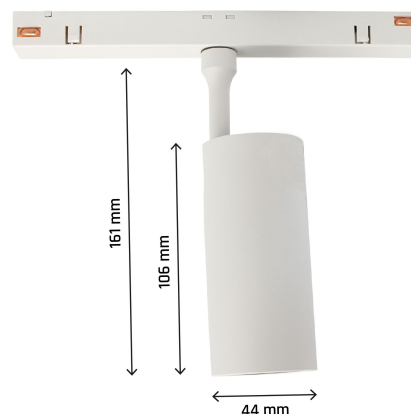

Related documents

 User manual Declaration of Conformity

