

SYSTEM SHIFT - GLOBE P

WLD+40034


On track luminaire SYSTEM SHIFT - GLOBE P, with a power of 5 W, high light efficacy 110 lm/W. It is made of high-quality components, supported by a 5-year warranty. It also stands out for its very high colour rendering index RA>90. It shines with a warm light (3000K), which promotes relaxation and rest, making the illuminated room cosier. Designed to be mounted on a track.



Power	5 W	Voltage	48 V
Colour temperature	3000 K	Colour of light	WW
Beam angle	165 °	Degree of protection (IP)	IP20


Technical data

Code	WLD+40034
Power	5 W
Nominal current	100 mA
Voltage	48 V
Energy consumption	5 kWh/1000h
Frequency	DC Hz
Protection class	III
Power factor	1
Useful luminous flux*	550 lm (360°)
Luminous flux**	435 lm (360°)
Lamp efficacy	110 lm/W
Colour temperature	3000 K
Colour of light	WW
Beam angle	165 °
RA	>90
Light source included	Yes
Producer of LED diodes	osram
Uniformity of color SDCM max	5
Dimmable	No
Working temperature range	-20 to +40 °
Lifespan	50000 h
Housing material	AL+PC
Degree of protection (IP)	IP20
Colour	White
Dimension (AxBxC)	100 (850mm wire) mm
For use	Inside
Assembly method	NA SZYBĘ
Application	Inside
Made in	PRC

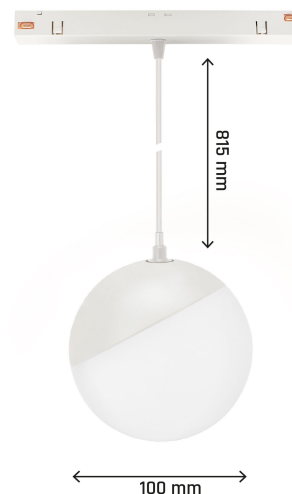

Related documents



 User manual



 Declaration of Conformity



 Photometric file



 3D model

