

# SYSTEM SHIFT - GRID L

WLD+40042



See  
more


On track luminaire SYSTEM SHIFT - GRID L, with a power of 22 W, high light efficacy 102 lm/W. It is made of high-quality components, supported by a 5-year warranty. It also stands out for its very high colour rendering index RA>90. It shines with a warm light (3000K), which promotes relaxation and rest, making the illuminated room cosier. Narrow beam angle 35° gives directional light so that selected objects or surfaces can be better exposed. Designed to be mounted on a track.



Power	<b>22 W</b>	Voltage	<b>48 V</b>
Colour temperature	<b>3000 K</b>	Colour of light	<b>WW</b>
Beam angle	<b>35 °</b>	UGR	<b>&lt;19</b>
Degree of protection (IP)	<b>IP20</b>		


## Technical data

Code	WLD+40042
Power	22 W
Nominal current	450 mA
Voltage	48 V
Energy consumption	22 kWh/1000h
Frequency	DC Hz
Protection class	III
Power factor	1
Useful luminous flux*	2250 lm (360°)
Luminous flux**	1550 lm (360°)
Lamp efficacy	102 lm/W
Luminous intensity	4600 cd
Colour temperature	3000 K
Colour of light	WW
Beam angle	35 °
UGR	<19
RA	>90
Light source included	Yes
Producer of LED diodes	osram
Uniformity of color SDCM max	5
Dimmable	No
Working temperature range	-20 to +40 °
Lifespan	50000 h
Housing material	AL+PC
Degree of protection (IP)	IP20
Colour	White
Dimension (AxBxC)	404x23x42 mm
For use	Inside
Assembly method	NA SZYŃĘ
Application	Inside
Made in	PRC

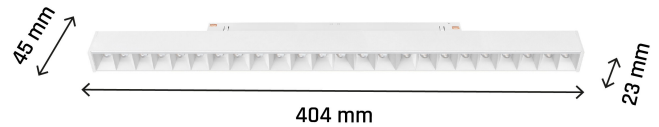


## Related documents




 User manual



 Declaration of Conformity



 Photometric file



 3D model

