

PESO 2

WOJP03311


LED luminaire PESO 2, with a power of 38 W, high light efficacy 140 lm/W. It is made of high-quality components, supported by a 5-year warranty. It shines with a warm light (3000K), which promotes relaxation and rest, making the illuminated room cosier. Narrow beam angle 40° gives directional light so that selected objects or surfaces can be better exposed. Designed for recessed mounting.



| | | | |
|--------------------|---------------|---------------------------|--------------|
| Power | 38 W | Voltage | 230 V |
| Colour temperature | 3000 K | Colour of light | WW |
| Beam angle | 40 ° | Degree of protection (IP) | IP20 |


Technical data

| | |
|------------------------------|--------------------|
| Code | WQJP03311 |
| Power | 38 W |
| Nominal current | 181.7 mA |
| Voltage | 230 V |
| Energy consumption | 38 kWh/1000h |
| Frequency | 50HZ Hz |
| Protection class | II |
| Power supply included | + |
| Manufacturer of power supply | TRIDONIC |
| Power factor | 0.93 |
| Useful luminous flux* | 5320 lm (360°) |
| Luminous flux** | 3420 lm (360°) |
| Lamp efficacy | 140 lm/W |
| Colour temperature | 3000 K |
| Colour of light | WW |
| Beam angle | 40 ° |
| RA | 80 |
| Light source included | + |
| Producer of LED diodes | CREE |
| Uniformity of color SDCM max | 3 |
| Dimmable | OPC |
| Working temperature range | -20/+40 ° |
| Lifespan | 50000 h |
| Housing material | Aluminum |
| Degree of protection (IP) | IP20 |
| Colour | Black |
| Dimension (AxBxC) | 82x280x100 mm |
| Mounting hole | 272x92 mm |
| For use | Inside |
| Assembly method | Recessed |
| Application | Inside |
| Made in | PL |
| Catalogue number | MDD11PR02*1983040B |

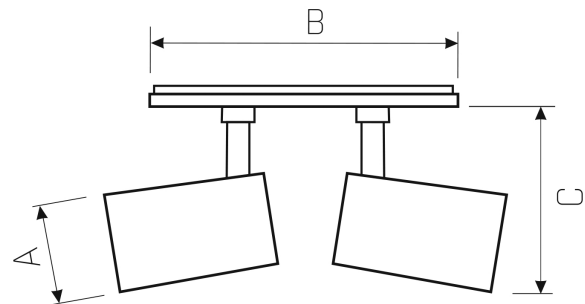


Related documents



 User manual



 Declaration of Conformity



 Photometric file