

# BRANTA METALICA

WQJP05689


LED luminaire BRANTA METALICA, with a power of 27 W, high light efficacy 125 lm/W. It is made of high-quality components, supported by a 5-year warranty. It also stands out for its very high colour rendering index RA>90. Lights up with neutral light - the most universal colour (4000K), which is suitable for the rooms we use on a daily basis, ensuring comfort during everyday activities. Narrow beam angle 36° gives directional light so that selected objects or surfaces can be better exposed. Designed to be mounted on a track.



|                    |               |                           |                      |
|--------------------|---------------|---------------------------|----------------------|
| Power              | <b>27 W</b>   | Voltage                   | <b>230 V</b>         |
| Colour temperature | <b>4000 K</b> | Colour of light           | <b>Neutral white</b> |
| Beam angle         | <b>36 °</b>   | Degree of protection (IP) | <b>IP20</b>          |

## Technical data

|                              |                    |
|------------------------------|--------------------|
| Code                         | WQJP05689          |
| Power                        | 27 W               |
| Nominal current              | 129.1 mA           |
| Voltage                      | 230 V              |
| Energy consumption           | 27 kWh/1000h       |
| Frequency                    | 50HZ Hz            |
| Protection class             | I                  |
| Power supply included        | +                  |
| Manufacturer of power supply | TCI                |
| Power factor                 | 0.93               |
| Useful luminous flux*        | 3375 lm (360°)     |
| Luminous flux**              | 2160 lm (360°)     |
| Lamp efficacy                | 125 lm/W           |
| Colour temperature           | 4000 K             |
| Colour of light              | Neutral white      |
| Beam angle                   | 36 °               |
| RA                           | 90                 |
| Light source included        | +                  |
| Producer of LED diodes       | CREE               |
| Uniformity of color SDCM max | 3                  |
| Dimmable                     | OPC                |
| Working temperature range    | -20/+40 °          |
| Lifespan                     | 50000 h            |
| Housing material             | Aluminum           |
| Degree of protection (IP)    | IP20               |
| Colour                       | ZŁOTY              |
| Dimension (AxBxC)            | 90x200x165 mm      |
| For use                      | Inside             |
| Assembly method              | on track           |
| Application                  | Inside             |
| Made in                      | PL                 |
| Other                        | L90B10 - 73000h ,  |
| Catalogue number             | MDR48PR02794036G , |

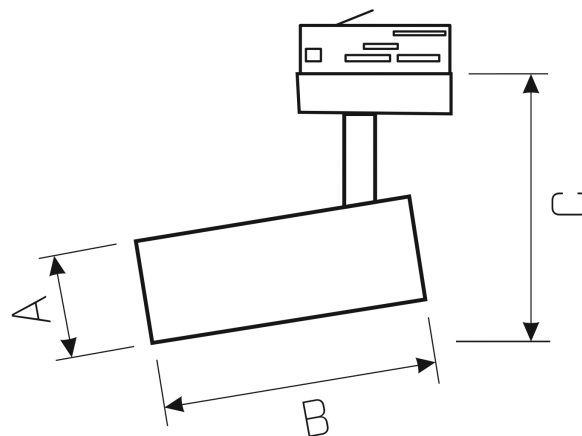

## Related documents

 User manual Photometric file