

GEMINA 2

W0JP06928

LED luminaire GEMINA 2, with a power of 27 W, high light efficacy 115 lm/W. It is made of high-quality components, supported by a 5-year warranty. It also stands out for its very high colour rendering index RA>95. Narrow beam angle 40° gives directional light so that selected objects or surfaces can be better exposed. Designed to be mounted on a track.




Power **27 W**
Colour of light **FRUIT**
Degree of protection (IP) **IP20**

Voltage **230 V**
Beam angle **40 °**


Technical data

Code	WQJP06928
Power	27 W
Nominal current	129 mA
Voltage	230 V
Energy consumption	27 kWh/1000h
Frequency	50HZ Hz
Protection class	I
Power supply included	+
Manufacturer of power supply	TCI
Power factor	0.93
Useful luminous flux*	3105 lm (360°)
Luminous flux**	2700 lm (360°)
Lamp efficacy	115 lm/W
Colour of light	FRUIT
Beam angle	40 °
RA	95
Light source included	+
Producer of LED diodes	CREE
Uniformity of color SDCM max	3
Dimmable	OPC
Working temperature range	-20/+40 °
Lifespan	50000 h
Housing material	Aluminum
Degree of protection (IP)	IP20
Colour	White
Dimension (AxBxC)	799x125x167 mm
For use	Inside
Assembly method	on track
Application	Inside
Made in	PL
Catalogue number	MDR46PR027FRUIT40W

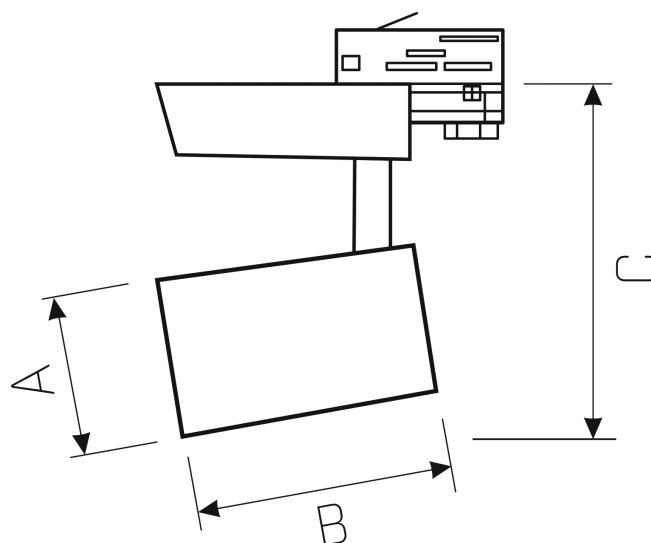

Related documents



 User manual