

# NYMPHEA CITY PRO

SLI031028CCT


Plafond NYMPHEA CITY PRO with the possibility of changing the light color (CCT), with a power of 18 W, high light efficacy 100 lm/W. Thanks to the ability to change the color temperature (CCT) in the range from 3000K to 6000K, we can adjust the light color depending on our needs and preferences. It is made of high-quality components, supported by a 5-year warranty. It has a very high degree of protection IP65, providing protection against the ingress of dust and water jets. IK10 class provides impact resistance. Designed for surface mounting. The product is certified by the National Institute of Hygiene, so it can be used in rooms with high hygienic requirements.



CCT

IP65

IK10

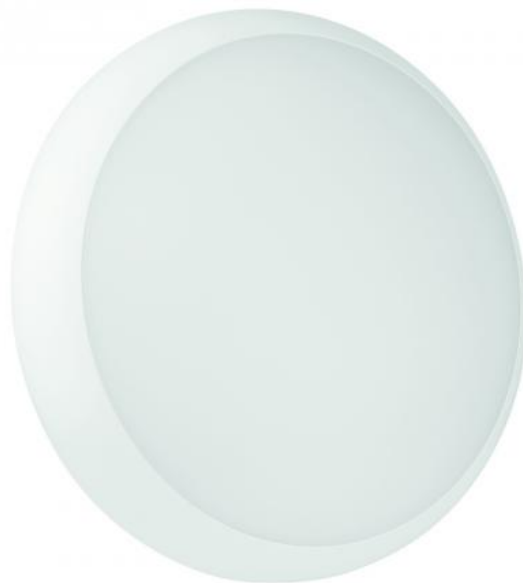

Power	<b>18 W</b>	Voltage	<b>230 V</b>
Luminous flux*	<b>1800 lm (120°)</b>	Colour temperature	<b>2700/4000/6000 K</b>
Colour of light	<b>CCT</b>	Beam angle	<b>120 °</b>
IK	<b>10</b>	Degree of protection (IP)	<b>IP65</b>

## Technical data


---

Code	SLI031028CCT
Power	18 W
Nominal current	80 mA
Voltage	230 V
Energy efficiency class	F
Energy consumption	18 kWh/1000h
Frequency	50HZ Hz
Protection class	II
Power supply included	+
Power factor	0.9
Useful luminous flux*	1800 lm (120°)
Luminous flux**	1800 lm (360°)
Lamp efficacy	100 lm/W
Luminous intensity	600 cd
Colour temperature	2700/4000/6000 K
Colour of light	CCT
Beam angle	120 °
RA	80
Light source included	+
Uniformity of color SDCM max	5
Dimmable	No
Working temperature range	-20/+40 °
Lifespan	50000 h
Housing material	PC
IK	10
Degree of protection (IP)	IP65
Colour	White
Dimension (AxBxC)	330X79 mm
For use	Inside/Outside
Assembly method	On the ceiling
Application	INT/EXT
Made in	PRC
Other	Variable temperature. Color 2700K / 4000K / 6000K ,

## Related documents

---



 Declaration of Conformity



 Photometric file



 3D model