

ALGINE

SLI035037CW


LED panel ALGINE, with a power of 45 W, high light efficacy 102 lm/W. It is made of high-quality components, supported by a 5-year warranty. It shines with a cold light colour (6000K), which is suitable for rooms where we need to be most focused and concentrated, such as technical workstations. Suitable for surface, recessed and suspended mounting. The product is certified by the National Institute of Hygiene, so it can be used in rooms with high hygienic requirements.



Power	45 W	Voltage	230 V
Luminous flux*	4880 lm (360°)	Colour temperature	6000 K
Colour of light	CW	Beam angle	120 °
IK	06	Degree of protection (IP)	IP20


Technical data

Code	SLI035037CW
Power	45 W
Nominal current	200 mA
Voltage	230 V
Energy efficiency class	F
Energy consumption	45 kWh/1000h
Frequency	50HZ Hz
Protection class	II
Power supply included	+
Power factor	0.95
Useful luminous flux*	4880 lm (360°)
Luminous flux**	4600 lm (360°)
Lamp efficacy	102 lm/W
Colour temperature	6000 K
Colour of light	CW
Beam angle	120 °
RA	80
Uniformity of color SDCM max	3
Dimmable	No
Working temperature range	-20/+40 °
Lifespan	50000 h
Housing material	Aluminum, PLASTIC
IK	06
Degree of protection (IP)	IP20
Colour	White
Dimension (AxBxC)	595x595x10 mm
Mounting hole	575x575 mm
For use	Inside
Assembly method	Recessed, On the ceiling, Suspended
Application	INT
Made in	PRC
Other	L80B50 50000h MTBF 80000h ,

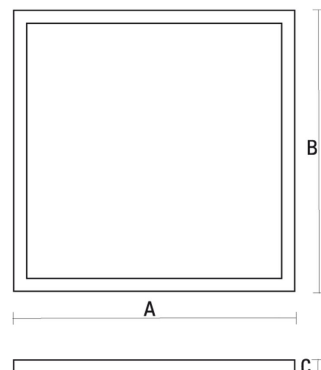


Related documents



 User manual



 Declaration of Conformity



 Photometric file



 3D model

