

# ALGINE 2w1

SLI037028NW



See  
more

Downlight luminaire ALGINE 2w1, with a power of 12 W, high light efficacy 100 lm/W. Lights up with neutral light - the most universal colour (4000K), which is suitable for the rooms we use on a daily basis, ensuring comfort during everyday activities. Suitable for both surface and recessed mounting. The product is certified by the National Institute of Hygiene, so it can be used in rooms with high hygienic requirements.



IK06



Power	<b>12 W</b>	Voltage	<b>230 V</b>
Luminous flux*	<b>1200 lm (120°)</b>	Colour temperature	<b>4000 K</b>
Colour of light	<b>Neutral white</b>	Beam angle	<b>110 °</b>
IK	<b>06</b>	Degree of protection (IP)	<b>IP20</b>


## Technical data

Code	SLI037028NW
Power	12 W
Nominal current	98 mA
Voltage	230 V
Energy efficiency class	E
Energy consumption	12 kWh/1000h
Frequency	50HZ Hz
Protection class	II
Power factor	0.5
Useful luminous flux*	1200 lm (120°)
Luminous flux**	1200 lm (360°)
Lamp efficacy	100 lm/W
Luminous intensity	420 cd
Colour temperature	4000 K
Colour of light	Neutral white
Beam angle	110 °
RA	>80
Light source included	Yes
Uniformity of color SDCM max	5
Dimmable	No
Working temperature range	-20 to +40 °
Lifespan	17000 h
Housing material	PLASTIC
IK	06
Degree of protection (IP)	IP20
Colour	White
Dimension (AxBxC)	170x35 mm
Mounting hole	ø145 mm
Assembly method	On the ceiling, Recessed
Application	Inside
Made in	PRC

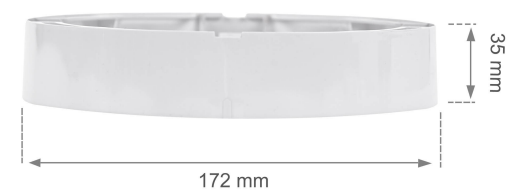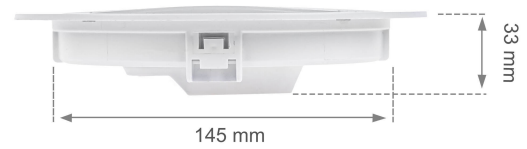


## Related documents




 User manual



 Declaration of Conformity



 Photometric file



 3D model

