

LUNARIX 1

SLIP007016

LED luminaire LUNARIX 1 with the possibility of changing the light color (CCT), with a power of 2 W, high light efficacy 100 lm/W. Thanks to the ability to change the color temperature (CCT) in the range from 3000K to 6000K, we can adjust the light color depending on our needs and preferences. The luminaire has lenses on both sides, so it shines up and down. It has a high IP54 rating, making it ideal for use in rooms with high humidity. It also stands out for its very high colour rendering index RA>90. Narrow beam angle 45° gives directional light so that selected objects or surfaces can be better exposed. Designed for surface mounting.

CCT

CRI
>90


IP54



Power	2 W	Voltage	230 V
Luminous flux*	200 lm (360°)	Colour temperature	2700/4000/6500 K
Colour of light	CCT	Beam angle	45 °
Degree of protection (IP)	IP54		


Technical data

Code	SLIP007016
Power	2 W
Nominal current	20 mA
Voltage	230 V
Energy consumption	2 kWh/1000h
Frequency	50HZ Hz
Protection class	II
Useful luminous flux*	200 lm (360°)
Luminous flux**	150 lm (360°)
Lamp efficacy	100 lm/W
Luminous intensity	220 cd
Colour temperature	2700/4000/6500 K
Colour of light	CCT
Beam angle	45 °
RA	>90
Light source included	Yes
Uniformity of color SDCM max	5
Working temperature range	-20/+40 °
Lifespan	17000 h
Housing material	POLIWĘGLAN
Degree of protection (IP)	IP54
Colour	White
Dimension (AxBxC)	110x100x40 mm
For use	Outside/Inside
Assembly method	On the ceiling
Application	INT/EXT
Made in	PRC

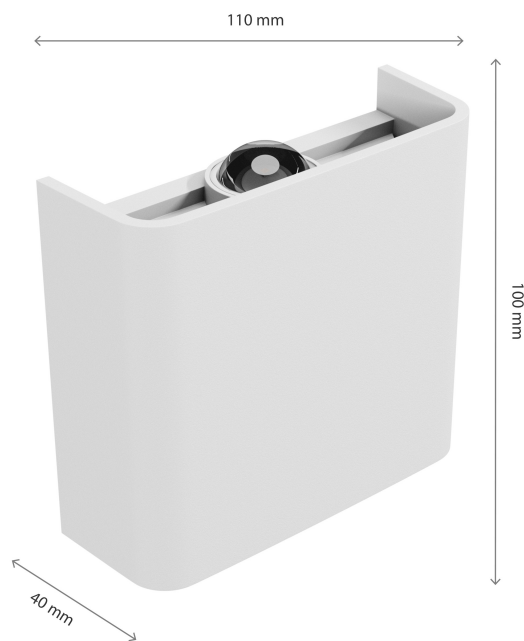


Related documents



 User manual



 Declaration of Conformity



 Photometric file

