

MONA 4

WQJP05522

LED luminaire MONA 4, with a power of 27 W. It is made of high-quality components, supported by a 5-year warranty. It also stands out for its very high colour rendering index RA>95. Narrow beam angle 60° gives directional light so that selected objects or surfaces can be better exposed. Designed for recessed mounting.




Power	27 W
Colour of light	BREAD
Degree of protection (IP)	IP20

Voltage	230 V
Beam angle	60 °

Technical data

Code	WQJP05522
Power	27 W
Nominal current	129 mA
Voltage	230 V
Energy consumption	27 kWh/1000h
Frequency	50HZ Hz
Protection class	II
Power supply included	+
Manufacturer of power supply	BOKE
Power factor	0.93
Useful luminous flux*	2565 lm (360°)
Luminous flux**	2295 lm (360°)
Lamp efficacy	95 lm/W
Colour of light	BREAD
Beam angle	60 °
RA	95
Light source included	+
Producer of LED diodes	CITIZEN
Uniformity of color SDCM max	3
Dimmable	1-10V
Working temperature range	-20/+40 °
Lifespan	50000 h
Housing material	Aluminum
Degree of protection (IP)	IP20
Colour	White
Dimension (AxBxC)	193x130 mm
Mounting hole	Ø160 mm
For use	Inside
Assembly method	Recessed
Application	Inside
Made in	PL
Catalogue number	CEL43PR027BREAD60W_DIM

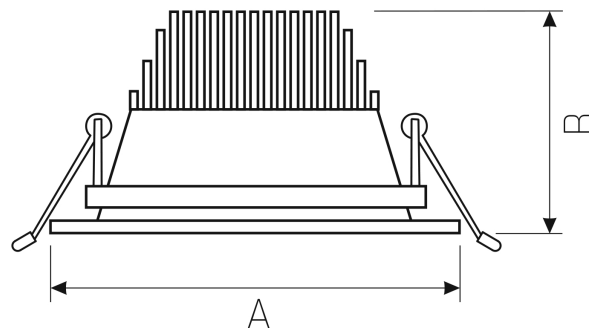

Related documents

 User manual Photometric file